



TECHNICAL DATASHEET

LX - 2016





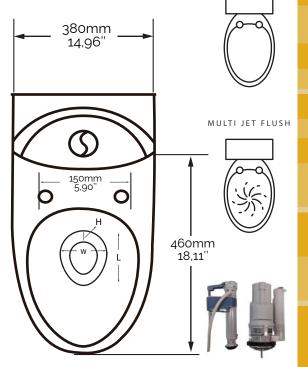

Reference LX - 2016 LX - 2016 Plus Versions Standard Plus Description Siphonic one-piece toilet S-trap, 300/400mm Roughing-in Size L 740mm 29,13" W 380mm 14,96" H 670 mm 26,37" Volume CBM 0,17m³ **Bowl Height** 390mm 15,35" without seat Bowl height with 410mm 16,14" seat (no lid included) Bowl lenght 460mm 18,11" Bowl shape **Elongated** Bowl width 390mm 15,35" Flush mechanism Dual flush tower valve 3lpf half flush & 3lpf half flush & Flush Per Liters (FPL) 6 lpf for full flush 6 lpf for full flush Flush valve size 3" Tank intlet / 28mm 1,10" / 66 mm 2,59" 28mm 1,10" / 80mm 3,14"

outlet size Siphon Jet Yes

Yes

Bowl flush type Multi Jet rim

Evacuation capacity 550gr

(grams)

Water seal size H: 54mm 2,12" L: 160mm 6,29" W: 130mm 5,11" Drainage Inner / Outer size 50mm 1,96" / 80mm 3,14"

Seat cover Soft close Seat weight 1,05 kg

Seat material PP

Distance between 150 mm 5,90" hinges post holes

Certifications

Incluede Tank fittings and seat cover, rubber flange and screws components

Dual Flush Button 3 lpf half flush

Fully glazed siphon



Slow-Close Toilet Seat

Flush Power 2016 Standard O gr

1300gr

Sizes are nominal and subject to be changed without prior notice. - Set configuration may vary depending on actual client negotiation and requirement.